

The Cloisit

. . . Utility Access Panel For Walls

concealing and providing convenient access
to a wide variety of services

- Cost effective
- Attractive moulded design
- Easily installed in minutes
- Left or right hand opening




Specify this injection moulded utility access panel to minimise the cost of on site framing, trimming and finishing work. Provides significantly improved access to all service installations.

See reverse for fitting instructions

INSTALLATION

- 1 Trim wall framing opening to 270mm square (Installed overall size is 303mm high x 310mm wide).
- 2 Ensure utilities are a minimum of 18mm back from the face of the wall lining to enable fitting.
- 3 Fix 2x20-25mm vertical battens as shown, recessed from face of lining to accommodate Closit frame and door.
- 4 Fit 4 screws provided, through fixing holes into recessed vertical batten.
- 5 Close it.

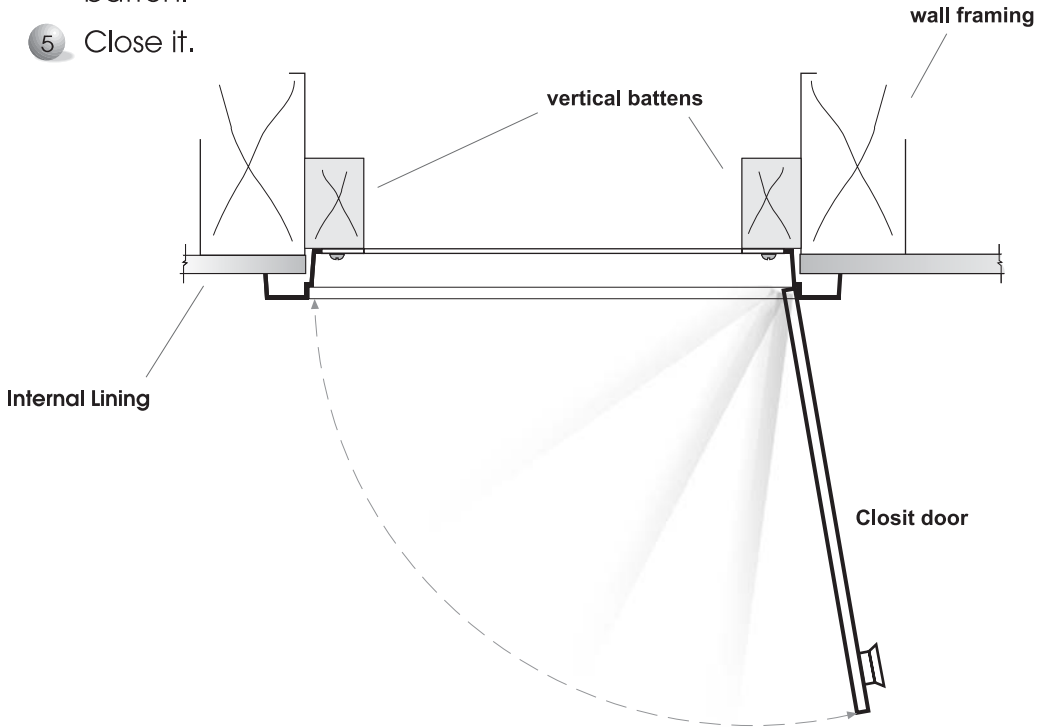

Distributed By

Manufactured By
Production Systems Limited
PO Box 55-005 Mission Bay Auckland.